

# LED TRI PROOF LUMINAIRE SL POWERSWITCH

120 CM | 150 CM A  
T  
G  
C



**Eligible**  
up to 140 lm/W

- +

**Power Switch**  
120 cm | 150 cm
- +

**5-pole through-wired**
- +


**optional PUSH/DALI dimmable version**

## Special features

- » integrated replaceable driver
- » robust PMMA housing
- » plug-in replaceable luminaire insert with PC cover on both sides
- » 5x2-pole spring terminal
- » rear connection option via centrally positioned rubber grommet
- » incl. spring steel mounting clips



Optional upgrade with emergency power battery module (116049) or order pre-wired (116366)

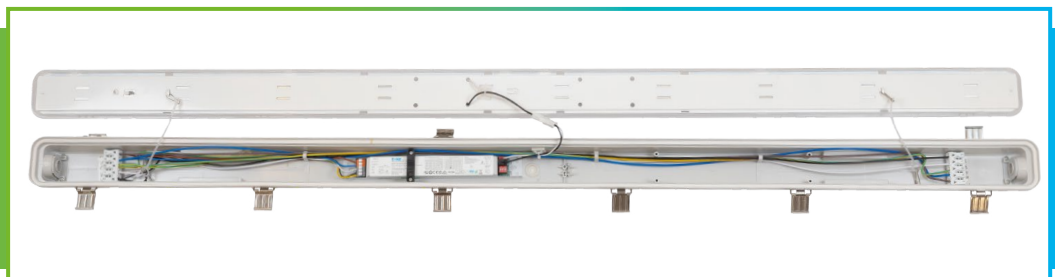


All important information, data and assembly types in the video.



## Linearly connectable

Circuit breaker	120 cm   39 W	150 cm   57 W
B10	24	17
B16	38	26
C10	45	31
C16	71	49

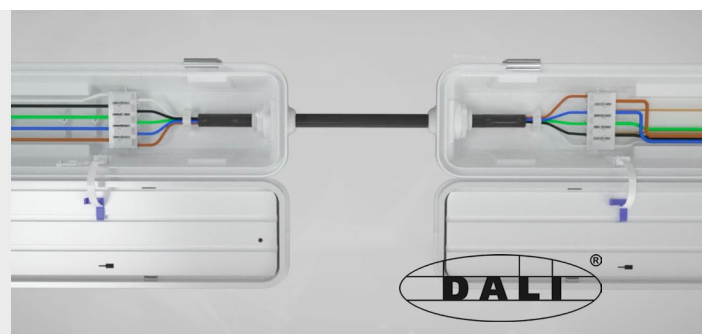


# LED TRI PROOF LUMINAIRE SL

Powerswitch



Art.Nr.	Length	Kelvin		Lumen	Protection Class	Watt
<b>116391</b>	1165 mm	4000		5600	IP66	39
<b>116389</b>	1465 mm	4000		8000	IP66	57



## 116391 | 120cm

Dip Switch1	Dip Switch2	Power	Watt	Lumen
OFF	OFF	200 mA	22 W	3200 lm
ON	OFF	250 mA	28 W	4000 lm
OFF	ON	300 mA	33 W	4800 lm
ON	ON	350 mA	39 W	5600 lm


## 116389 | 150cm

Dip Switch1	Dip Switch2	Power	Watt	Lumen
OFF	OFF	200 mA	33 W	4550 lm
ON	OFF	250 mA	41 W	5700 lm
OFF	ON	300 mA	49 W	6850 lm
ON	ON	350 mA	57 W	8000 lm

# PUSH/DALI dimmable Version



Art.Nr.	Length	Kelvin		Lumen	Protection Class	Watt	<b>DALI DIMMABLE</b>
<b>116392</b>	1165 mm	4000		5600	IP66	39	
<b>116390</b>	1465 mm	4000		8000	IP66	57	



## 116392 | 120cm

Dip Switch1	Dip Switch2	Dip Switch3	Dip Switch4	Power	Watt	Lumen
ON	OFF	ON	ON	75 mA	7 W	1050 lm
OFF	OFF	OFF	ON	200 mA	20 W	2800 lm
OFF	OFF	ON	OFF	300 mA	29 W	4200 lm
OFF	OFF	OFF	OFF	400 mA	39 W	5600 lm

## 116390 | 150cm

Dip Switch1	Dip Switch2	Dip Switch3	Dip Switch4	Power	Watt	Lumen
ON	ON	ON	ON	75 mA	10 W	1350 lm
OFF	ON	OFF	ON	200 mA	25 W	3550 lm
OFF	OFF	ON	OFF	350 mA	44 W	6200 lm
OFF	OFF	OFF	OFF	450 mA	57 W	8000 lm

